
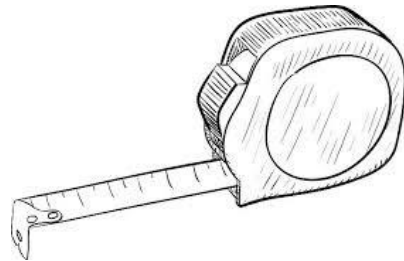



Measuring roller for custom manufacture

We know the importance of selecting and ordering the correct roller for your application so here's a little help.

- Ideally, have vernier callipers and a tape measure as well as suitable "roller enquiry" form- available aedrollers.com/downloads

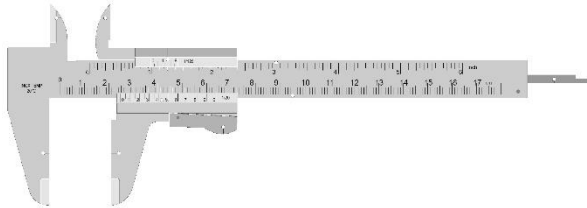

- Roller body: Plastic solid, Plastic tube, Stainless, mild steel or rubber covered? If rubber covered, it's handy to know the tube diameter as well
- If rollers are damaged, measure the installation width know as BB. It's useful to have this size

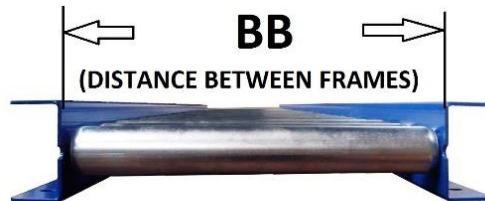


- Select roller type. Mark which one on enquiry

CDR DSIM double sprocket	CDR SIM single sprocket	GRP grooved for polyband
IR Industrial welded ends	PR / RG swaged ends	PRP / PRG plastic
PolyVee PJ belts 2.24 pitch	TR54 plastic taper segments	Drum fixed shaft. No bearings

Measuring roller for custom manufacture

TYPE AX1 L A	TYPE AX2 LG AF A
TYPE AX3 LG DF A	TYPE AX4 L LG AF A
TYPE AX5 L M LOOSE/CAPTIVE	TYPE AX6 L M LOOSE/CAPTIVE
TYPE AX7 L D LOOSE/CAPTIVE	TYPE AX8 L M
TYPE AX9 A	TYPE AX10 D LC A
TYPE AX12 L A	TYPE AX13

Measuring roller for custom manufacture

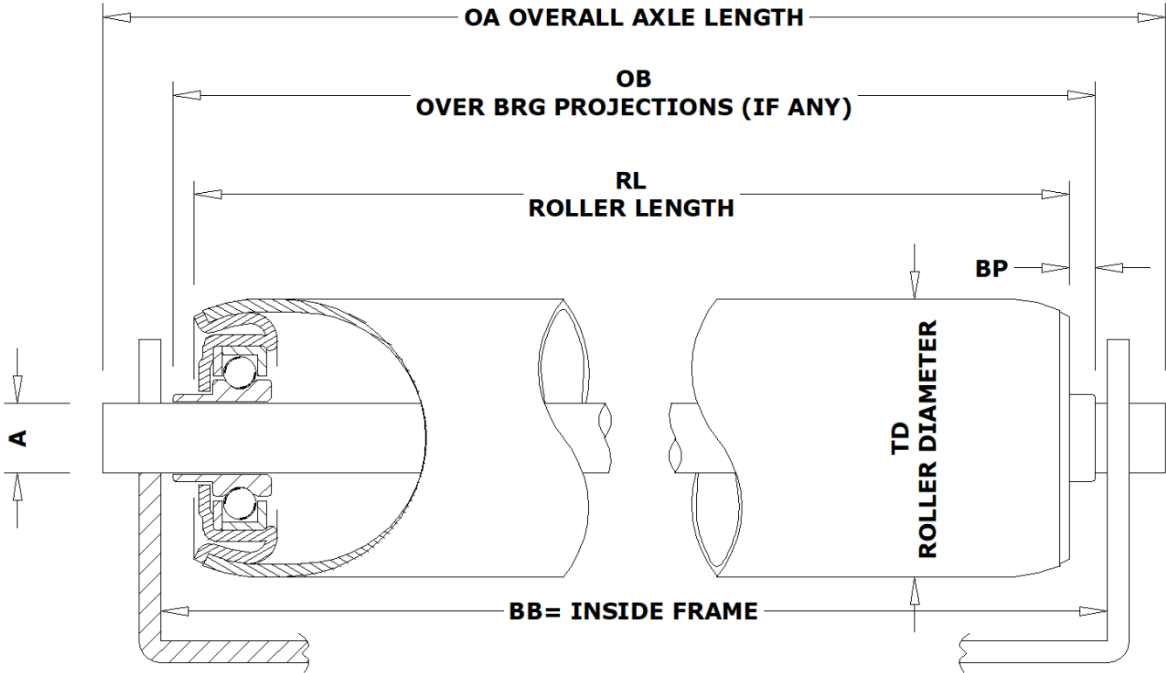

ALTERNATIVE PROFILE

