


ROLLER FINDER

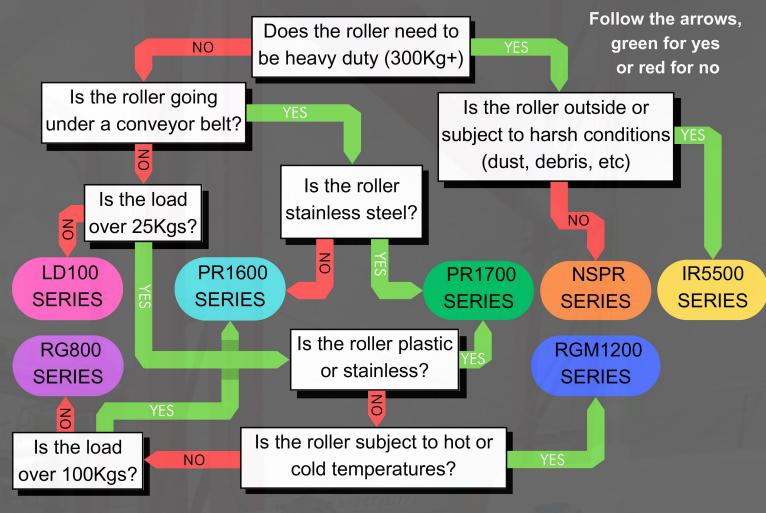

- Rollers made to measure
- Quick lead times
- Competitive pricing

- Designed and manufactured in GB
- Catalogs available for all rollers
- Other sizes available on request

Roller Choices



LD100

Light Duty Rollers

- Ø20-50mm
- 0-50°
- 48M per min.
- 800mm Max.

Available in

Plastic Stainless BZP steel



RG800

Light - Medium

Duty Rollers

- Ø30-60mm
- 0-80°
- 48M per min.
- 2100mm Max.

Ideal for unit handling of loads up to 100Kg



RGM1200

Medium Duty Rollers

- Ø50-80mm
- -30-120°
- 48M per min.
- 2100mm Max.

Superior temperature range, can be used under belt



PR1600

Med - Heavy Duty Rollers

- Ø50-80mm
- 0-80°
- 72M per min.
- 2100mm Max.

Ideal for unit handling and under belt use for loads up to 300Kg



PR1700

Med - Heavy Duty Rollers

- Ø35-89mm
- 0-50°
- 72M per min.
- 2100mm Max.

Available in

Plastic Stainless BZP steel



IR5500

Heavy Duty Rollers

- Ø50-168mm
- -20-80°
- 72M per min.
- 2400mm Max.

Welded ends ideal for bulk handling

needs



NSPR

Extra Heavy Duty Rollers

- Ø20-168mm
- 0-80°
- 72M per min.
- 2400mm Max.

Huge range of sizes and wall thickness. Can be used under belt