

Sleeved rollers with Female Thread for manual handling – BS SLEEVE



BS54 & BS60 general purpose steel rollers with pvc 3mm or 5mm thick rubber like sleeve for manual & gravity applications



Found in >	MATERIAL	Sleeve Options	Great for
Battery Handling	Steel Base Roller + pvc sleeve	-BS54 (55mm FOD)	Protecting goods
Despatch Areas			Non-Marking
Airports	50-60 shore A	-BS60 (60mm FOD)	Stone/granite tops
Packing Lines			Cheaper than rubber

Roller Type	Finished Diameter	Female Thread (default)	Other Female Thread sizes available	Minimum Length Maximum Length	Load Capacity†
RG50AX88 –BS54	Ø55mm	M8x16	M6x12 (AX86)	>200MM <1200MM	80kgF UDL
RG50AX88 –BS60	Ø60mm	M8x16	M6x12 (AX86)	>200MM <860MM	80kgF UDL
RG50MDAX88 –BS54	Ø55mm	M8x16	M10x24 (AX810)	>200MM <1200MM	80kgF UDL
RG50MDAX88 –BS60	Ø60mm	M8x16	M10x24 (AX810)	>200MM <860MM	80kgF UDL
PR50AX88 –BS54	Ø55mm	M8x16	M10x24 (AX810)	>200MM <1200MM	140kgF UDL
PR50AX88 –BS60	Ø60mm	M8x16	M10x24 (AX810)	>200MM <860MM	140kgF UDL
PR50HDAX810 –BS54	Ø55mm	M10x24	M12x30 (AX812)	>200MM <860MM	200kgF UDL
PR50HDAX810 –BS60	Ø60mm	M10x24	M12x30 (AX812)	>200MM <860MM	200kgF UDL

IMPORTANT: †Load Capacity calculated on based roller (not Sleeve capacity) and on roller lengths <800MM. For lengths greater than 800mm please ask on enquiry.

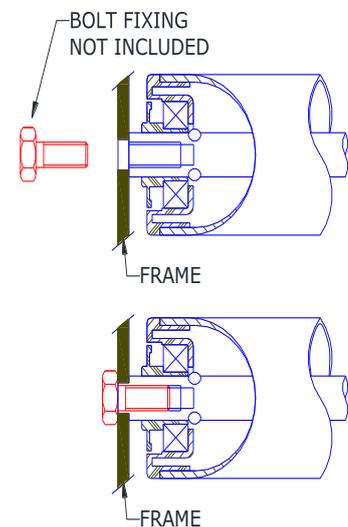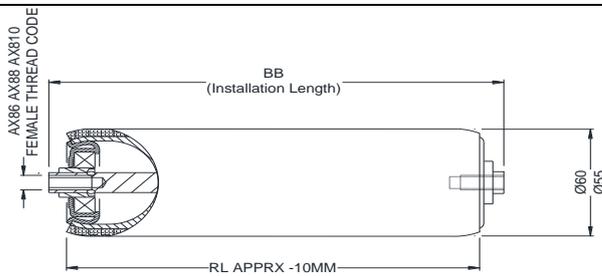

Roller Type (ie RG50AX88-BS54)	
Installation Length (BB)	
Female Thread size	
Quantity Required	
Special Requests:	

Company Name and address:-

Signed.....Print.....

Date: Purchase order No.....

Collect or Send by Carrier – circle as appropriate

Comments:

Please sign & return Order