


# **CHAIN DRIVEN ROLLERS WITH POLYMER 14Tooth x1/2" FRICTION ACCUMULATION or FIXED DRIVE**

Tubes can be externally covered using Rubber, Polyurethane & PVC sleeved in a variety of colours.

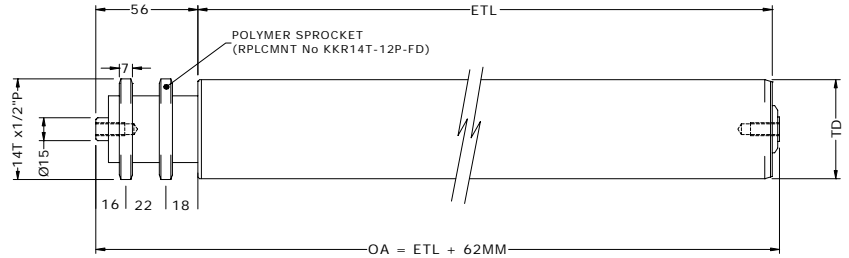

### Fixed drive rollers with nylon plastic sprocket – **Stainless steel or zinc plated steel**

TUBE DIA (TD)	Roller Type	Female thread (AX8 axle)	Bearing type	Max. roller speed	Max. roller capacity
Ø50x1.5	CDR-50-ACPOL-14FDS	M6x12, M8x15 & M10x25	Steel housed 6002 zz Precision	30 m/min	65 KGf
Ø60x2	CDR-60-ACPOL-14FDS	M6x12, M8x15 & M10x25	Steel housed 6202 zz Precision	30 m/min	65 KGf

### Friction accumulation drive with nylon plastic sprocket – **Stainless or zinc plated steel**

TUBE DIA (TD)	Roller Type	Female thread (AX8 axle)	Bearing type	Max. roller speed	Max. roller capacity
Ø50x1.5	FCDR-50-ACPOL-14FDS	M6x12, M8x15 & M10x25	Steel housed 6002 zz Precision	30 m/min	45 KGf
Ø60x2	FCDR-60-ACPOL-14FDS	M6x12, M8x15 & M10x25	Steel housed 6202 zz Precision	30 m/min	45 KGf

Contact Name, Tel/Fax & Email\*.....

Company Address\*.....

Date Required.....Special Requests.....

QTY*	Material stainless or BZP Steel	Friction or Fixed drive	TD*	ETL	OA	Female Thread Size
						AX8 =
						AX8 =
						AX8 =

