



IR Series with Rings

Return /Impact Industrial rollers

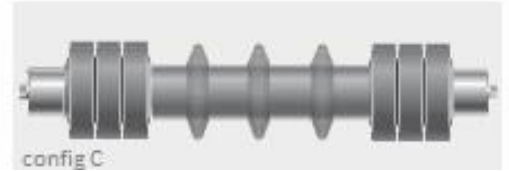

Heavy duty steel rollers, manufactured to suit the most hostile environments

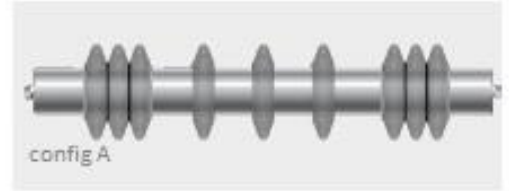

Config A Pointed rings spaced in the centrally – Medium Duty Plant
 Config C Flat rings, positioned at the roller extremities, pointed rings spaced centrally - Medium/Heavy Duty Plant
 Config B Flat rings on belt conveyors - Heavy Duty Plant

Roller Type	Roller Diameter & wall thickness	Axle Diameter	Bearing Type +External Seal	Load Capacity
IR63M108	Ø60 x 2.6	Ø20	6204 Precision +R20	365 kgF udl
IR63M133	Ø63.5 x 3	Ø20	6204 Precision +R20	365 kgF udl
IR89M133	Ø89 x 3	Ø20 & Ø25	6204 +R20 / 6305 +R25	565/650 kgF udl
IR89hd6M133	Ø89 x 5	Ø25	6305 Precision +R25	565/650 kgF udl
IR89M150	Ø89 x 3	Ø20 & Ø25	6204 +R20 / 6305 +R25	565/650 kgF udl

IR Industrial Series

Roller Type (ie IR89M133)	
Axle length OA	
Roller face/length OF	
Axle Diameter A	
Axle type & dimensions (ie AX2 14AF 16LG)	
Quantity Required	
Ring Configuration	

<p>AX2 M/CD FLATS</p>	AX2 DOUBLE OPEN FLATS
<p>AX4 M/CD SLOTS</p>	AX4 DOUBLE SLOT
<p>AX5 MALE THREAD</p>	AX5 - MALE THREAD AX6 - MALE THREAD ON REDUCED DIAMETER
<p>AX12 INTERNALLY CAPTIVATED</p>	AX12 PLAIN ENDS

Company Name and address:-

Signed.....Print.....
 Date:
 Purchase order No.:
 Collect or Send by Carrier – circle as appropriate

Please sign & return Order