

ROLLER SERIES PREFIX

RG = STEEL, GRAVITY OILED BEARINGS
USE: LIGHT /MEDIUM

PRG = PLASTIC, GRAVITY FREE ROLLING
USE: LIGHT DUTY







SSRG = STAINLESS, GRAVITY FREE ROLLING
USE: LIGHT / MEDIUM

PR = STEEL, GREASED PRECISION MEDIUM TO HEAVY






PRP = PLASTIC ROLLER SEALED GREASED PRECISION
USE: MEDIUM DUTY

SSPR = STAINLESS, SEALED GREASED PRECISION
USE: MEDIUM TO HEAVY

IR = INDUSTRIAL ROLLER
USE: HEAVY DUTY /UNDERBELT/BULK HANDLING

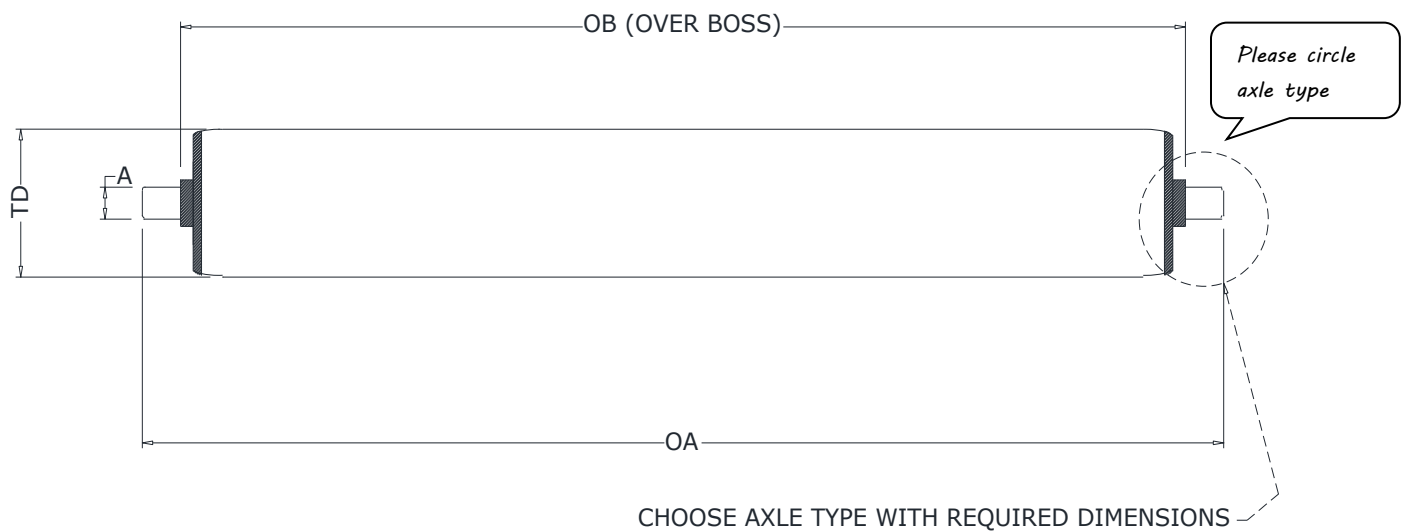

CHOOSE AXLE TYPE WITH REQUIRED DIMENSIONS



Example order code:-

RG	60	10	5000OB	5500OA	AX2	4	12
----	----	----	--------	--------	-----	---	----

Labels for order code: Roller Series, Roller TD, A (axle), OB Length, OA Length, MACHINED DIMENSIONS, Axle Type.

- AX 1 = SPRING LOADED
- AX 2 = FLATTED
- AX 3 = D FLAT
- AX 4 = SLOTTED
- AX 5 = MALE THREAD

- AX 6 = TURN DOWN & MALE THREAD
- AX 8 = FEMALE THREAD (D&T)
- AX 9 = PLAIN LOOSE
- AX 10 = CROSS DRILLED FOR WIRE/SPLIT PIN
- AX 12 = CAPTIVE AXLE

Company.....



.....



.....

Quantity.....

Requested despatch date.....

Notes/ Special Requests.....

