

M2M Grooved Roller Order/Enquiry: yes/No O/No.....



Made 2 Measure Grooved Slave Rollers


GRP = BZP STEEL,
STEEL HOUSED BEARINGS
ANTI-STATIC YES

GRP KTR = BZP STEEL
PLASTIC HOUSED BEARINGS
ANTI-STATIC YES

SSGRP = STAINLESS, PLASTIC
HOUSED BEARINGS
ANTI-STATIC YES

OPTIONAL EXTRAS: BS 54 (55DIA PVC SLEEVE) BS60 (60DIA PVC SLEEVE)

TD (Tube diameter) Ø35, Ø40, Ø50 Ø51 Ø60	Material: BZP Steel or Stainless Steel	Option extra BS54 or BS60 soft covering
Over Bosses OB =	Over Axle OA=	
Groove Positions	GP1= GP2= GP3= GP4= or CU= (if GP1= 62 & GP3=62)	
Axle size (ie 11H) Ø8, Ø10 Ø12 Ø14 or hexagon 8H 11H		
Axle Type & Dimension: AX followed by execution, followed by action then length (ie female thread M8 = axle execution AX8 8)		
Quantity Required	Notes	
Note: Do not use roller length (RL) as a reference dimension. Using RL between differing products may result in your roller not fitting correctly		

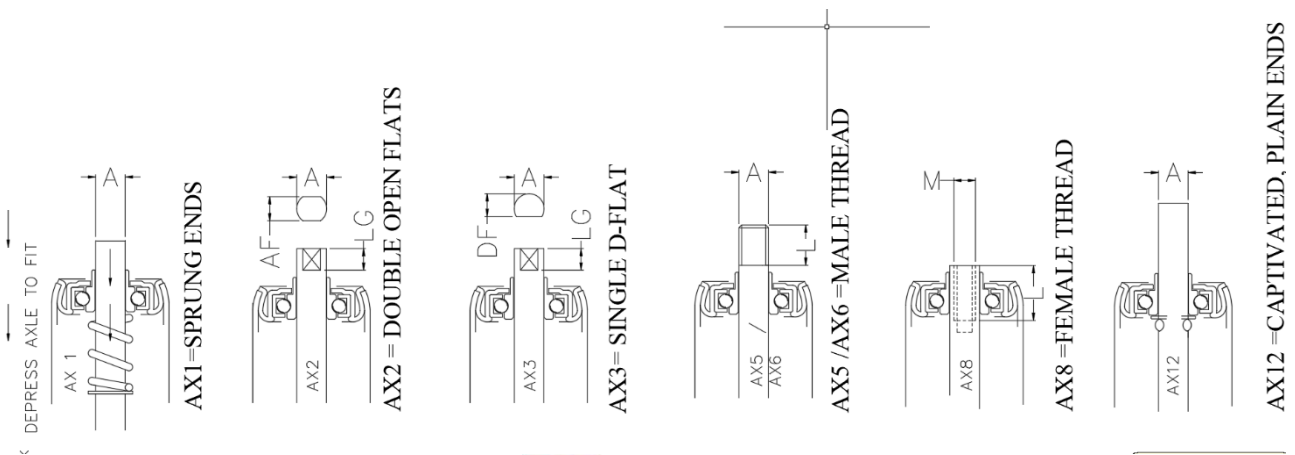

Company.....



.....



.....

Quantity.....

Requested despatch date.....

Notes/ Special Requests.....