Light to Mid Duty conveyor support Series type: ADJ2-STAND



BZP steel conveyor height adjustable height support

- Height adjustment from 660mm +340mm*
- Suitable for AED's conveyors using GTL frames
- Robust folded C section 2mm thick with BZP finish
- Adaptable: free standing, bolt down
- Mounting bracket (Smiley) for camber or horizontal installation
- Use quick adjust knobs to control exact height required



Installation & operating instructions


Remove packaging & check all fasteners are secure.

If the conveyor was ordered in two or more sections, they will need to be connected using the stand smileybracket to join linear lengths together

Stands are for Gravity Flow or set Parallel and adjust to within operational the height stated, using stand cross-tie M.

For gravity flow (camber), lock stand upright to using smileybracket "Smile" & bottom location holes, set infeed height then adjust out-feed height to give desired flow.

For Parallel (horizontal): Lock stand upright using top & bottom smileybracket location holes

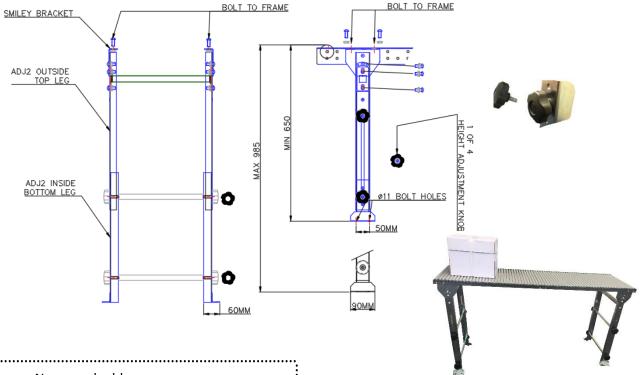

Company Name and address:-

SignedPi	rint
----------	------

Date:

Enquiry/ Purchase order No.:

Collect or AED to despatch – circle as appropriate

^{*}Nominal height only. Range affected by roller & frame