


SSPR Series Stainless Steel Rollers Medium to Heavy duty & Under belt

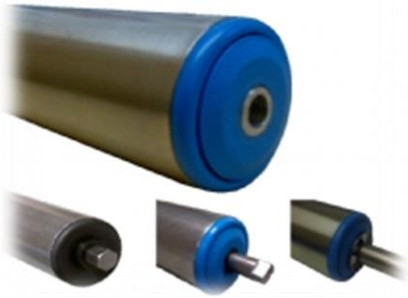


SSPR series AED's **SSPR series** of stainless rollers are used for medium to heavy duty applications of 20kg-250kgs and suitable for under belt or belt return rollers.

Rollers which marked ✓ indicate suitable for wash down but not direct pressure wash


Found in >	MATERIAL	EXTRAS
Shop Checkout	Stainless Steel Grade 303/304/409	Rubber Sleeve
Under Belt		Bonded Rubber
Airport X-ray		Polyurethane
Food Warehouse		-

Roller Type	Roller Diameter	Wash Down	○ Axle	⬡ Axle	Bearing Type (all precision 2rs)	Load Capacity†
SSPR-25	∅25.4x2	--	∅8*	-	s608	40kgF udl
SSPR-35	∅35 x1.2	✓	∅8	8H	PR35+S6001	80kgF udl
SSPR-38HD	∅38x3	--	∅15*	11H	s6202	140kgF udl
SSPR-40	∅40 x1.5	✓	∅8 ∅10 ∅11 ∅12 ∅15*	11H	PR40-37 +S6002	80kgF udl
SSPR-40WD	∅40 x3	✓	-	11H	s6202	140kgF udl
SSPR-50	∅50x1.5	✓	∅10 ∅11 ∅12 ∅14	11H	KTR-EBH50-47+S6202	140kgF udl
SSPR-60	∅60x2.6	✓	∅10 ∅11 ∅12 ∅14	11H	KTR-EBH60-54+6202	160kgF udl
SSPR-63	∅63x3	✓	∅20	-	AED BH63+s6004	300kgF udl
SSPR-76	∅76x3	✓	∅20*	-	AED BH76 +s6204	370kgF udl
SSPR-4	∅102x3	✓	∅25*	-	AED IR4+s6204/s6305	460kgF udl

IMPORTANT: Axles* do not have a bearing boss. †Load Capacity calculated on standard lengths & axle fixing. Please ask us to confirm advisable load on quotation/order

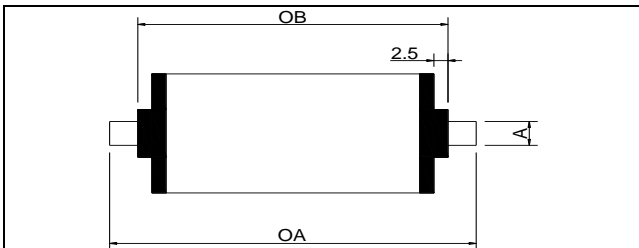

Roller Type (ie SSPR-50)	
Axle length OA	
Over boss OB	
Axle size (ie 11H)	
Axle Type & Dimension (ie AX8 M8x16L)	
Quantity Required	
Notes:	

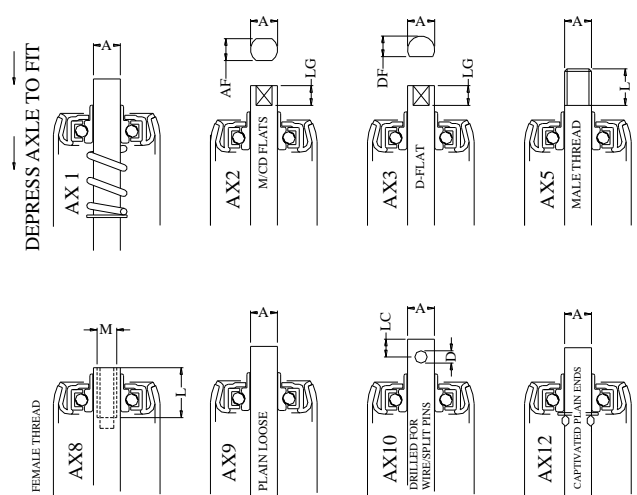

Company Name and address:-

Signed..... Print.....
 Date: Purchase order No.....
 Collect or AED to despatch – circle as appropriate
 Comments:

Please sign & return Order