


GTLD13 General Parcel /Table top Conveyor

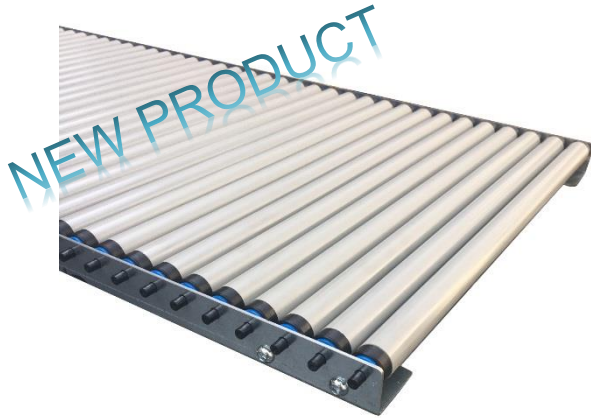

Gravity conveyors for goods 0.50kgs upto 13kgs*

GTLD13 conveyors/ roller track provide a reliable low cost solution to manual handling.

Conveyors' are zinc / galvanised finish as standard with optional extra (to customers' colour), powder coat finished frames.

Steel frames with roller materials, High Impact PVC or optional Zinc plated mild.

Customise track: Width & modified length to suit application – price on request

PVC Roller Conveyor capable of handling goods 13Kg UDL per ≥ 75% BB
Available Widths; 200 BB, 300 BB & 400 BB
Versatile; suitable items as small as 60mm or 0.50kgs in weight
Length 1.5m or optional reduced length to customer requirements
Adjustable Height supports allow track to decline for smooth movement

- Conveyor tracks manufactured from high quality rigid 2mm thick steel and supplied complete with high impact PVC rollers or zinc plated steel with handy sprung axles for quick change.
- Height adjustable stands;
Fully adjustable between **670mm <1000mm TOR**
- Low maintenance for trouble free service.



How to choose your conveyor:

- Step 1 – Length of conveyor required <1.5M (default length 1.5m)
- Step 2 – Width required -200mm, 300mm or 400mm
- Step 3 – With or without stands.



BB (Inside Frame)	Frame Length	Conveyor Type followed by width		Conveyor Price +vat	height adjustable stands – suffixed by BB (inside frame)	Price per Stand +vat
200MM	1496MM	<i>GTLD13-20</i>	200MM x1496MM	£269	ADJ2-GTLD13-200BB	£32
300MM	1496MM	<i>GTLD13-30</i>	300MM x1496MM	£289	ADJ2-GTLD13-300BB	£35
400MM	1496MM	<i>GTLD13-40</i>	400MM x1496MM	£299	ADJ2-GTLD13-400BB	£38
Optional extras						
Cut down length Conveyor Price +£18			BZP Steel Rollers Conveyor Price + £10		Flat-End-Stop Price £12 Each	

Comments

Rollers Above frames

Safety | Features | Operation

- Safety information
- **Standard features**
- operating instructions



- Safety information

Move the conveyor: keep hands, clothing and other items clear of the rollers & conveyor ends.

Do not exceed the conveyor load capacity (stated at quotation or request from AED Rollers Ltd), as this may result in possible operator injury and/or damage to the conveyor.

Avoid wearing excessively loose clothing and keep long hair tied back when working with moving equipment

Broken or damaged parts must be replaced immediately

- Standard features

Gravity/Manual conveyors are constructed by AED Rollers Ltd / to customer specification/quotation

Load capacity per **80 kgF UDL** conveyor module. Individual Items not to exceed **13 kgF* \geq 75% width**

If supplied:

AJ2 adjustable stands with bolt to floor feet (2x \varnothing 11mm holes per upright)

Adjustable height range 670mm <1000mm floor to Top of Roller

Adjust height or camber by loosening the 4x 60dia knobs



Set conveyor Parallel or Decline*

- Installation & operating instructions

Remove packaging. If the conveyor was shipped in two or more sections they will need to be connected using the stand smiley bracket (see diagram)


If supplied. Fit stands securely and check all fasteners are tight. For additional security bolt stands to floor using base mounting holes 2x \varnothing 11 per upright

Stands are for Gravity Flow or set Parallel and adjust to within operational the height stated, using 4x 60dia knob.

For gravity flow (camber): lock stand upright to using smiley bracket middle & bottom location holes, set infeed height then adjust out-feed height to give desired flow, keeping uprights perpendicular to floor

For parallel assembly (horizontal):

Lock stand upright using middle & bottom smiley bracket location holes, keeping uprights perpendicular to floor

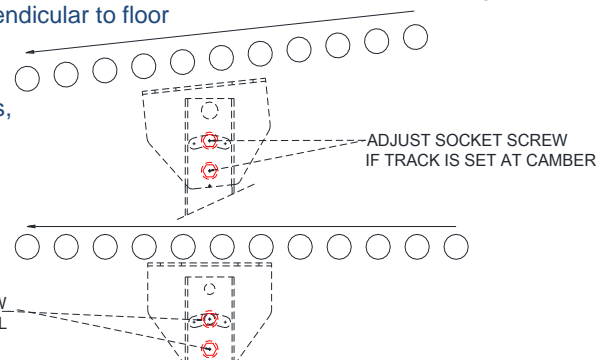

*see quotation/consult AED