

RG Series Steel Gravity Rollers Light to Medium duty




RG series rollers are general purpose steel rollers with oiled free running (cup & cone) style bearings for manual/gravity applications

Found in>	MATERIAL	TUBE EXTRAS
Warehouses	Zinc Plated Steel tube Steel axles	Rubber Sleeve
Factories		Bonded Rubber
Airports		Polyurethane
Cutting Equipment		

Roller Type	Roller Diameter & wall thickness	○ Axle	⬡ Axle	Bearing Type +housing	Load Capacity†
RG-20	Ø20 x1.5 wall	Ø6 Ø8	-	KTR20.01+plastic	3kgF udl
RG-25 defunct	Ø25.4 x1.2 wall	Ø6	-	3GF418+steel	15kgF udl
RG-30	Ø30 x1.5 wall	Ø6, Ø8 Ø10	-	MTR30.20+steel	40kgF udl
RG-35 (PR-35)	Ø35 x1.2 wall	Ø8	8H	PR35 6001+plastic	45kgF udl
RG-38 (defunct)	Ø38 x1.5 wall	-	-	-	-
RG-40	Ø40 x1.5 wall	Ø8 Ø10 Ø11 Ø12	11H	MTR48.2+steel	70kgF udl
RG-50LD*	Ø50x1.5 wall	Ø8 Ø10 Ø11 Ø12	11H	KTR50.03+plastic	30kgF udl
RG-50	Ø50x1.5 wall	Ø8 Ø10 Ø11 Ø12	11H	MTR50.2+steel	80kgF udl
RG-50MD	Ø51 x2 wall	Ø8 Ø10 Ø11 Ø12	11H	MTR50.2+steel	80kgF udl
RG-60	Ø60 x2 wall	Ø10 Ø11 Ø12	11H	MTR60.2+steel	80kgF udl
RG-60MD	Ø60 x2 wall	Ø10 Ø12 Ø14 Ø15	11H	MTR60.3+steel	120kgF udl
RG-80MD	Ø80 x2 wall	Ø14	-	MTR80.3+steel	120kgF udl

*LD=all weather bearing. † Load Capacity calculated on standard lengths & axle fixing. Please ask us to confirm advisable load on quotation/order

Roller Type (ie RG-50LD)	
Axle length OA	
Over boss OB	
Axle size (ie 11H)	
Axle Type & Dimension (ie AX8 M8x16L)	
Quantity Required	
Notes	

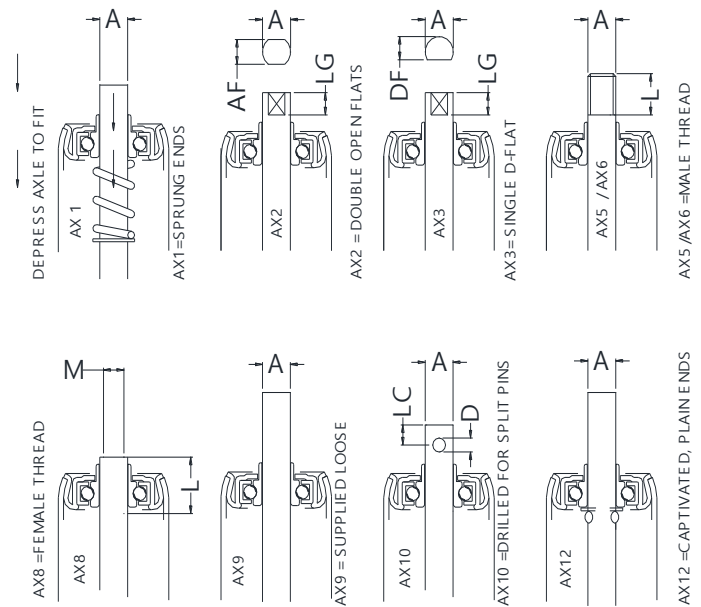

Company Name and address:-

Signed.....Print.....
 Date:
 Purchase order No.:
 Collect or AED to despatch – circle as appropriate

Please sign & return Order